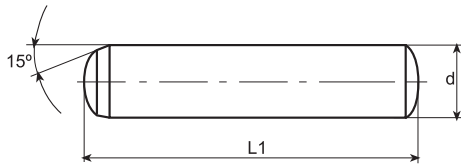


DIN 6325**Pasadores cilíndricos. Acero templado**

ISO 8734 EN

d1 tolerancia	0,8	1	1,5	2	2,5	3	4	5
L	(2-8)	(4-10)	(4-16)	(6-20)	(6-24)	(8-32)	(10-40)	(12-50)
d1 tolerancia	6	8	10	12	14	16	20	
L	(14-70)	(18-90)	(24-120)	(28-120)	(36-130)	(40-130)	(50-130)	
ST	FST	ST2 (HRC:60±2) templado ●			A2			

* Resistencia a la tracción mínima 600 N/mm².