


DIN 1481**Pasadores elásticos**

ISO 8752 EN

d1 (nom)	8	10	12	13	14	16	18	20
d1 (min)	8,5	10,5	12,5	13,5	14,4	16,5	18,5	20,5
(max)	8,8	10,8	12,8	13,8	14,8	16,8	18,9	20,9
d2≈	5,5	6,5	7,5	8,5	8,5	10,5	11,5	12,5
s	1,5	2	2,5	2,5	3	3	3,5	4
a (min)	2	2	2	2	2	2	2	3
Carga cizalladura de dos hilos (Kn)	42,76	70,16	104,1	115,1	144,7	171	222,5	280,6
L	(10-120)	(10160)	(10-180)	(10-180)	(10-200)	(10-200)	(10-200)	(10-200)
ST	FST ●	ST2 (HRC:60±2) templado			A2 ●			

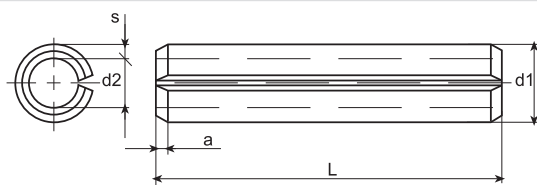